



- Wall or ceiling mounted powerful fixture designed for non-maintained (NM), non-maintained/maintained (NM/M) or standard general lighting / centralised (C) emergency lighting available in all following versions:
  - **AUTOTEST (-AT)**
  - **CENTRAL BATTERY (C.HILLUX) for non-addressable CBS**
- All C.HILLUX versions can be used also for general lighting 230V AC in order to achieve uniform design of general lighting and emergency lighting fixtures
- Conforming to the requirement of EN60598-2-22, EN1838, EN62034
- Design:
  - Body made of PC
- nástenné/stropné výkonné núdzové svietidlo určené pre netrvalé (NM), trvalé/netrvalé (NM/M) alebo normálne 230V / (C) centrálné napájané núdzové osvetlenie (verzie C.HILLUX môžu byť použité ako bežné svietidlá 230V AC a tým dosiahnuť kompatibilitu tvaru núdzových a všeobecných svietidiel v danom interiéru (napr každé 5 svietidlo je núdzové, ostatné ako klasické bez núdzového modulu), dostupné vo verziách pre:
  - **AUTOTEST (-AT)**,
  - **CENTRAL BATTERY (C.HILLUX) pre neadresovateľné CBS**
- spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034
- konštrukcia:
  - teleso z nerozbitného PC

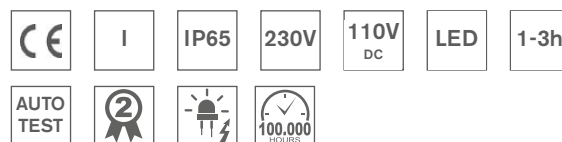

- Input Power (5xLED):**
- 11,5W / 15,3VA (maintained M)
  - 2,2W / 5,7VA (non-maintained NM)
  - 8,5W / 10,9VA (CBS)

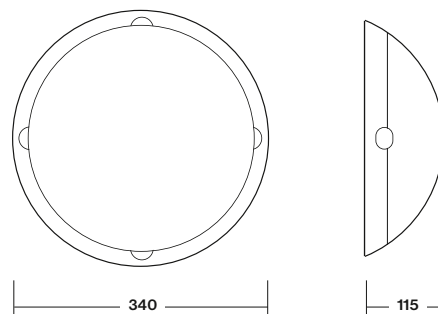

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTIHILL-LED-AT.1h	NM/M	1h	5x HighPower LED 6000K	690 lm / 600 lm	NiMH 4,8V/4,0Ah	261-B-07-01	1,7 kg
MULTIHILL-LED-AT.1h	NM/M	1h	5x HighPower LED 3500K	690 lm / 600 lm	NiMH 4,8V/4,0Ah	261-B-07-03	1,7 kg
MULTIHILL-LED-AT.3h	NM/M	3h	5x HighPower LED 6000K	720 lm / 465 lm	NiMH 4,8V/4,0Ah	261-B-12-01	1,7 kg
MULTIHILL-LED-AT.3h	NM/M	3h	5x HighPower LED 3500K	720 lm / 465 lm	NiMH 4,8V/4,0Ah	261-B-14-02	1,7 kg

Type	Version	Light Source	Light Flux	Order Code	Weight
C.HILLUX 5xLED/230V AC/DC	CBS NON-ADDRESSABLE	5x HighPower LED 6000K	675 lm	261-B-09-01	1,2 kg
C.HILLUX 5xLED/230V AC/DC	CBS NON-ADDRESSABLE	5x HighPower LED 3500K	675 lm	261-B-09-03	1,2 kg
C.HILLUX 10xLED/230V AC/DC	CBS NON-ADDRESSABLE	10x HighPower LED 6000K	1350 lm	261-B-11-01	1,2 kg
C.HILLUX 7xLED/110V DC	CBS NON-ADDRESSABLE	7x HighPower LED 3500K	945 lm	261-B-13-01	1,2 kg